


Denpur™ Liquid Roof Deck Membrane (1-2 mm)

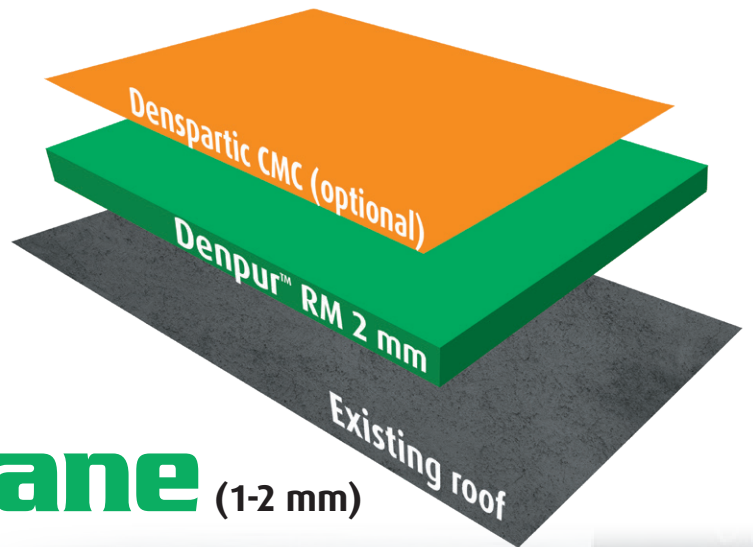

Roof deck waterproofing membrane, with enhanced crack bridging properties for existing roofs exposed to light pedestrian traffic.

Benefits

- Application temperature from 5°C (open to traffic after 24 hours)
- Increased dynamic crack bridging class B4.2 at -20°C
- Chemically resistant to oils, petrol, diesel and de-icing salt
- Anti-slip properties for pedestrians and vehicles
- High abrasion resistance
- Seamless application
- Heat reflective
- Reduces inside temperature
- Many colors
- Improves the efficiency of roof installed solar panels
- Risk free installation
- No open fire during installation
- Adhesion to all horizontal and vertical surfaces
- Green technology based on renewable raw materials
- Reduces carbon footprint
- Expected lifetime more than 30 years



For more colors please see separate color chart.



Denpur™ Liquid Roof Deck Membrane (1-2 mm)



Roof deck coating class
"OS 11 A" system
Certificate No.:
IE-4092301TDE

SYSTEM BUILD-UP

LAYER	PRODUCT	CONSUMPTION (kg/m ²)	INTERMEDIATE	THICKNESS (mm)	APPLICATION
MEMBRANE	DENPUR RM	2.0 - 2.5	None	Min. 2.0	Notched rubber squeegee
COLOUR COAT (optional)	Denspartic CMC	0.1-0.15	None	0.1	Short haired paint roller

TECHNICAL DATA

Properties

System thickness

Adhesive strength at T_{norm} DIN EN 1542

Adhesive strength after freeze-thaw with de-icing salt DIN EN 13687-1 and -2

Dynamic crack bridging (-20°C) DIN EN 1062-7

Grip and slip resistant DIN EN 13036-4, DIN 51130

Chemical resistance DIN EN 13529

Abrasion resistance (H22 Wheel) DIN ISO 9352, ASTM D 1044

Impact resistance DIN EN ISO 6772-2

Fire class EN 13501-1

Value

Approx. 1 - 2 mm

≥ 4.0 N/mm²

≥ 2.3 N/mm²

IV_{T+V} (B4.2)

55 Skt R11-V4 and R12-V6 or R13 V10

Test liquids DiBT No. 1, 3, 10

<1500 mg/1000 U

4 Nm - no cracks

B_{fl}-s1